### MODEL

## Description

Ultra Precision Strain Gage based 20510 Crane Load Cell is versatile, compact and rugged. It is used for tension measurements, Crane weighing. It is used in tension mode only. Tension Loading can be done with Dee / Bow Shackle & Hook. It is available in 3 Tf to 50 Tf capacities. Higher capacity can be offered.

#### **Features**


- $\rightarrow$  Standard 3, 5, 7.5, 10, 15, 20, 30, 50 TF Capacities available.
- $\rightarrow$  High Alloy Tool Steel construction for resistance against shock and overload.
- $\rightarrow$  Perpendicular hole design helps in minimizing external moments effects and improves safety & accuracy.
- $\rightarrow$  It is light weight and portable.
- $\rightarrow$  High Temperature version for foundry applications is available upon request.
- $\rightarrow$  Can be designed for higher capacities and to fit your dimensional needs.


# Applications

- $\rightarrow$  To measure rope tension by inserting as a link in to the line.
- $\rightarrow$  To measure towing force of the vehicles and Ships.
- $\rightarrow$  Force Measurement Tension Dynamometer.
- → Hanging & Crane Scale. → Material handling equipments.  $\rightarrow$ Cargo handling in Ship Yards.

#### **Performance Specification**

| Electrical Termination              |                                      |
|-------------------------------------|--------------------------------------|
| Finish & Construction               | Electroless Nickel Plated Tool Steel |
| Deflection                          | < 0.4 mm at FSO                      |
| Temperature Effect on Zero          | < 0.04% FSO/ <sup>0</sup> C          |
| Temperature Effect on Output        | < 0.025% FSO/ <sup>0</sup> C         |
| Temp. Compensated Range             | 10-50 °C                             |
| Ultimate Overload of Rated Capacity | 200%                                 |
| Safe Overload of Rated Capacity     | 150%                                 |
| Cable Length (4 Core Screened)      | 10 Mtrs                              |
| Insulation Resistance (50 VDC)      | > 1000 Mega Ohms                     |
| Output Resistance                   | 700 ± 3 Ohms                         |
| Input Resistance                    | 780 ± 15 Ohms                        |
| Zero Balance                        | ±1.0% FSO                            |
| Creep (30 minutes)                  | < ±0.05% FSO                         |
| Non-Repeatability                   | < ±0.025% FSO                        |
| Hysteresis                          | < ±0.05% FSO                         |
| Non - Linearity                     | < ±0.15% FSO                         |
| Nominal Output                      | 1.0 m V/ V                           |
| Excitation Voltage                  | 10 VDC- Maximum 15 VDC               |
| Standard Capacities                 | 50 TF.                               |
| renormance specification            |                                      |



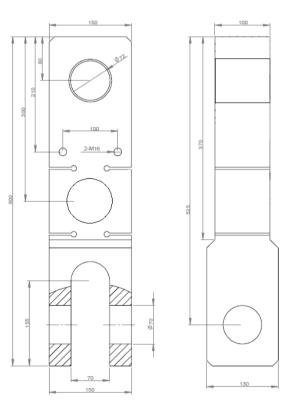

#### Specification are subject to change.

# All dimensions are in mm.



Made in INDIA by:

ADI ARTECH

TRANSDUCERS PVT. LTD.

917/1, G.I.D.C. Estate, Makarpura, Vadodara - 390 010, Gujarat, INDIA **Mobile** : +91-9374068998, 9879444551, 9054467370 **Email** : sales@adiartech.com, adiartech@adiartech.com **Website** : www.adiartech.com